



# Cable Lock Bracket Kit

## PRODUCT DESCRIPTION

This kit will allow interfacing of aftermarket actuators to a vehicle equipped with a cable type door lock system. This kit will work with CDL-04r or other aftermarket door lock actuators.



## BOX CONTENTS

Two kits with each kit containing the following.



- (1) U-clip
- (2) Cable holders
- (1) Bracket
- (2) Hexagon screws
- (2) Zinc screws

## INSTALLATION


1. Locate a spot for the bracket and door lock actuator. Screw bracket onto door panel and fix the cable holders onto the bracket.
2. The actuator must be mounted parallel to this bracket and cable assembly. Make sure the cable can be pushed straight back and forth.

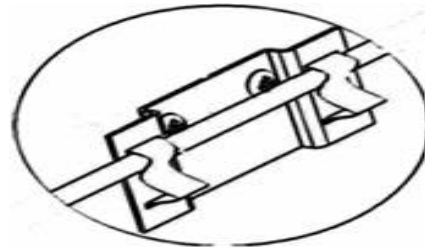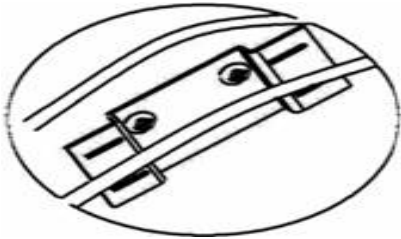


3. **BE CAREFUL NOT TO NICK OR CUT THE INNER STEEL CABLE WHILE CONNECTING THE BRACKET.** The cable leather should now be stripped away between the indentations on the bracket. If it becomes necessary to remove the cables from the clamps, the cable must be marked carefully so that it can be reinstalled into the exact same position.
4. The rod from the actuator needs to be carefully bent so that it lies parallel to the cable about an eighth inch away from it. The rod can be placed either above or below the cable. The clamp is then placed over the rod and saddled onto the cable.

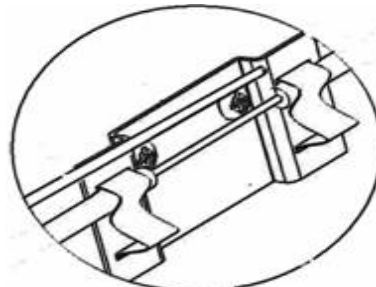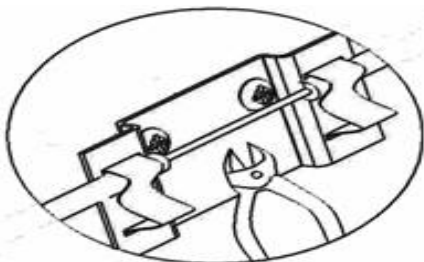

5. There is a U-Clip insert that fits between the clamp and the cable. This insert must be used to prevent damage to the cable. The lock actuators are adjusted and centered per the instructions, and the hexagon screws on the clamp are tightened.



6. Installation completed.

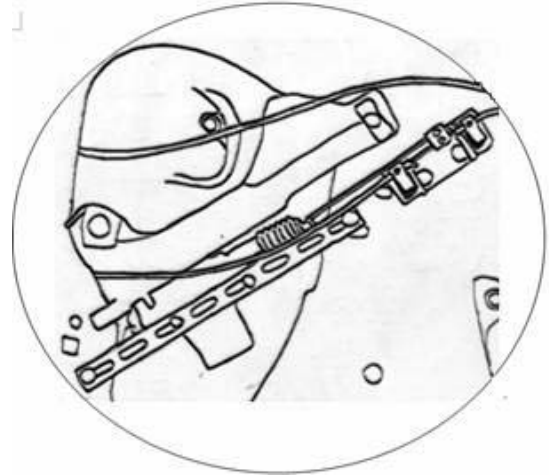

Limited 1 Year Warranty.

Commercial Electronics . 264 Haydons Road. Wimbledon. London . SW19 8TT. UK.

Tel: 44+208 404 7105 Fax: 44+208 404 7104

Email: [sales@hawkcaralarm.com](mailto:sales@hawkcaralarm.com) [www.hawkcaralarm.com](http://www.hawkcaralarm.com)